


Technical bulletin / Bollettino tecnico

CF-01-E-175-B1-A03-N-V

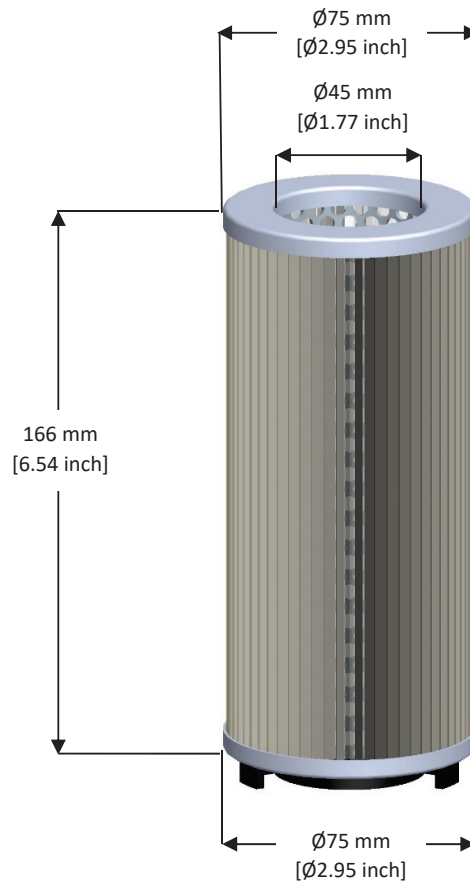

Technical data / Dati tecnici

Application / Applicazione	Hydraulic Filter / Filtro idraulico
Filter media / Media filtrante	Inorganic microfibers / Microfibra inorganica
Filtration rate / Grado filtrazione	5 μ m
MAX differential pressure / MAX pressione differenziale	16 bar [232 psi]
By-pass valve / Valvola di by pass	3.5 bar [51 psi]
Gasket material / Materiale guarnizione	VITON

Cross Reference - main applications / applicazioni principali

Internormen 01.E175.3VG.16.S1.V